

SERIES 4E

LOW CAPACITY NOTE DISPENSER

The Tidel Low Capacity Note Dispenser is designed for retail organizations that have a need to dispense notes throughout the day, using a secure and auditable process.

The Low Capacity Note dispenser supports up to four cassettes, with each cassette capable of storing up to 500 notes. The system has the capability to dispense 60 notes per minute.

Dispensing notes and accessing the note cassettes are completely auditable and managed by individual user PIN. Note dispensing limits can be set on a per individual basis.


The Low Capacity Note Dispenser measures 30.75" high, making it ideally suited to be placed under a retail store counter.



SERIES 4e

LOW CAPACITY NOTE DISPENSER

SPECIFICATIONS

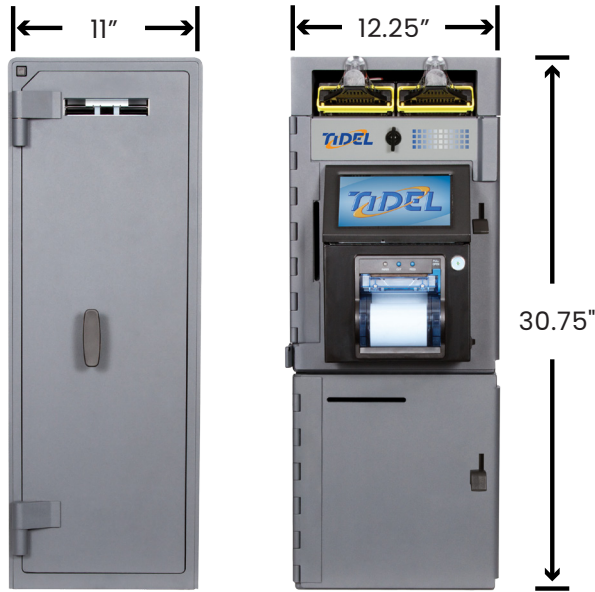

Weight:	250 lbs. (114 kg) dispenser only 399 lbs. (181 kg) with Series 4e
Height:	30.75" (781 mm)
Width:	11" (280 mm) dispenser only 23.25" (591 mm) with Series 4e
Depth:	20" (508 mm) dispenser only 23" (584 mm) with Series 4e

HARDWARE FEATURES

- Supports up to 4 denominations/cassettes
- 400-500 notes per cassette
- Dispenses up to 60 notes per minute
- Audible alarm in vault door
- Includes an independent note reject tray
- 30.75" high, ideally suited for retail store environment
- System connectivity via data cables (provided with system)

SOFTWARE FEATURES

- Can be connected to Ethernet network for interface to POS, back office PC, or remote locations
- Includes a complete cash management application
- All activity auditable to an individual user through the use of PINs
- Advanced accounting features allow for extensive list of reports
- Supports network downloads for software upgrades or for new currency releases
- Remote reports can be downloaded using an Ethernet or optional cellular connection

WARRANTY

- 1 year parts and 90 days labor (inside the US)
- 1 year parts only (outside the US)

POWER REQUIREMENTS

- 120 VAC 60Hz or 220 VAC 50Hz



A SESAMI COMPANY

Tidel | 2025 W. Belt Line Rd. #114 | Carrollton, TX 75006 | Tel: 972.484.3358 | 800.678.7577
© 2022 Tidel | sales@tidel.com | www.tidel.com